

•Exceptional Construction.


All seams are seal welded, not caulked or spot welded. Our filter panels are held in place with 3/8" wing nuts, not metal clips. We offer the highest quality workmanship backed by our unequalled turn around time. Our team also offers housings in 304 Stainless Steel & other materials with all seams seal welded against leakage. A safety cage guarding the outlet is standard. Silencer materials are also added.

•PFP106AFP Panel Element

This filter panel incorporates pleated polyester filter media @ 10µ retention. Panels can be cleaned by using indirect compressed air or mild detergent cleaning solution. Woven wire screens armor both faces of the synthetic filter media. A pull strap across the face of the panel ensures ease in maintenance. The frame is one piece electrogalvanized steel. Downstream expanded metal or woven wire face screen.

•Options include:

Support legs, weather hoods, hinged weather hoods, gauges, ΔP Taps, spring latches, rupture disk panels, and louvers. Top or side outlet is also available.

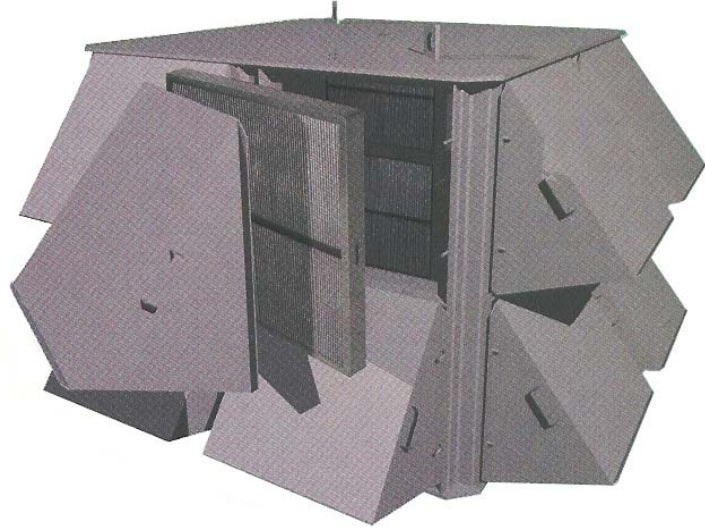

Panel Filters should be used in non-pulsating flows. Consult us before considering use w/reciprocating compressors.


Enameled Steel Housing Cat. No.	304SS Housing Cat. No.	Typ. Flow CFM	Max Flg	Panel Pstns	W Max*	L Max*	H Max*	C Ref*	Wgt Lbs.	Panel Elem. No.
S10-0050-FF-120	S12-0050-FF-120	2,500	12"	1	25"	24"	26.5"	6"	150	PFP106AFP
S10-0051-FF-200	S12-0051-FF-200	5,000	20"	2	32"	25"	26.5"	6"	250	PFP106AFP
S10-0052-FF-200	S12-0052-FF-200	7,500	20"	3	32"	28"	26.5"	6"	290	PFP106AFP
S10-0053-FF-200	S12-0053-FF-200	10,000	20"	4	32"	32"	26.5"	6"	390	PFP106AFP
S10-0054-FF-360	S12-0054-FF-360	15,000	36"	6	60"	58"	26.5"	8"	750	PFP106AFP
S10-0055-FF-360	S12-0055-FF-360	20,000	36"	8	60"	60"	26.5"	8"	800	PFP106AFP
S10-0056-FF-360	S12-0056-FF-360	25,000	36"	10	60"	58"	54"	8"	1000	PFP106AFP
S10-0057-FF-360	S12-0057-FF-360	30,000	36"	12	60"	60"	54"	8"	1150	PFP106AFP
S10-0058-FF-360	S12-0058-FF-360	35,000	36"	14	60"	60"	54"	8"	1250	PFP106AFP
S10-0059-FF-360	S12-0059-FF-360	40,000	36"	16	60"	60"	54"	8"	1350	PFP106AFP
S10-0060-FF-360	S12-0060-FF-360	45,000	36"	18	60"	58"	78"	8"	1500	PFP106AFP
S10-0061-FF-360	S12-0061-FF-360	50,000	36"	20	60"	60"	78"	8"	1650	PFP106AFP
S10-0062-FF-360	S12-0062-FF-360	60,000	36"	24	60"	60"	78"	8"	1800	PFP106AFP



Four Panel S12 304SS filter unit designed to meet specific installation needs.

(1)Dimensions are approximate. Refer to approval drawings for actual dimensions & tolerances.

(2)Optional Weather Hoods add 11" to L and/or W i.e. hoods on two sides add 22"



Note 304SS safety cage downstream of panel filters. Helps prevent leaves, pens, hats, and other debris from traveling into the compressor, blower, or turbine intake at filter change out!!

