

# Purolator®

## F312 Industrial Strength 1" & 2" Disposable Panel Filters Fiberglass Media

The F312 disposable panel filters are designed to withstand the demands of tough industrial and commercial applications. Purolator assures filter durability by utilizing construction features not found in traditional designs.

**Frame** – Purolator F312 frames are produced using post consumer recycled materials. The unique Monobond pinch frame concept involves a one-piece frame sealed to the media under heat and pressure. This construction feature produces a continuous bond of media to board around the periphery of the frame eliminating weak corners and air bypass. The use of a high tensile strength polyethylene binder increases the integrity of the seal, allowing the filter to withstand varying temperatures and humidity levels.

When compared to traditional designs, the Monobond type filter's notched frame corners allow units to interlock providing up to 33% savings on warehouse space and freight costs.

**Media** – Purolator F312 filters are manufactured with superior grade fiberglass media to guarantee full depth loading and high dust holding capacity. A computer controlled manufacturing process assures a uniform gradient density pattern in the media.

To enhance filtration capability and prevent migration of finer particles, the filter media has a skin backing and is evenly coated with a gelled adhesive.

**Application** – Purolator's F312 filters perform best in conditions where large quantities of lint and dust are present. Their rugged construction makes them industry leaders in the high-velocity system, prefilter market.

- Performance is enhanced by a skin backing on the air leaving side of the media
- Space saving notched frame
- Reduce warehouse space and shipping costs with innovative Monobond pinch frame notched design
- Improved aerodynamics reduce restriction to air flow
- Safe, fast, easy installation
- Larger effective filtering surface area
- Wide selection of standard sizes
- Classified Class 2 by Underwriters Laboratories, Inc.



Pinch  
Frame  
Design




Notched  
Frame  
Design

**Precision Filtration Products**  
YOUR ONE  FOR FILTERS

## F312 Performance Data\*

Category	F312 1"	F312 2"
Air Flow Velocity (FPM)	300	300
Initial Resistance (In. W.G.)	.07"	.09"
Recommended Final Resistance (In. W.G.)	.50"	1.0"
Average Arrestance (%)	72%	75%

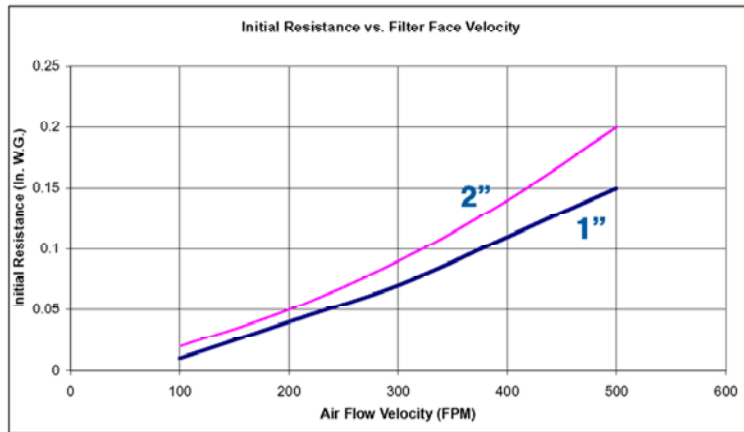

\* Resistance climbs more rapidly on 1" thus reducing dust holding capacity and filter life. Testing conducted in accordance with the ASHRAE 52.1-1992 Test Standard. Classified Class 2 by Underwriters Laboratories, Inc.

### Standard 1" and 2" Sizes

1 Inch					2 Inch	
8 x 16	12 x 18	14 x 25	16 x 25	20 x 25	10 x 20	18 x 24
8 x 30	12 x 20	14 x 30	16 x 30	20 x 30	12 x 24	20 x 20
10 x 10	12 x 24	15 x 20	18 x 18	22 x 22	14 x 20	20 x 24
10 x 16	12 x 25	15 x 25	18 x 20	24 x 24	14 x 25	20 x 25
10 x 20	12 x 30	15 x 30	18 x 24	24 x 30	15 x 20	24 x 24
10 x 24	14 x 14	15 x 30.625	18 x 25	25 x 25	16 x 16	25 x 25
10 x 25	14 x 16	16 x 16	18 x 30		16 x 20	
10 x 30	14 x 18	16 x 18	20 x 20		16 x 24	
12 x 12	14 x 20	16 x 20	20 x 22.25		16 x 25	
12 x 16	14 x 24	16 x 24	20 x 24			

Distributed by:

**Precision Filtration Products**  
 YOUR ONE  FOR FILTERS



Clarcor Air Filtration Products  
 P.O. Box 32578 • Louisville, KY 40232-2578  
 1-800-999-3458 • Fax 502-961-0930

Visit Our Web Site • [www.airguard.com](http://www.airguard.com)

Email - [mailbag@airguard.com](mailto:mailbag@airguard.com)

CLARCOR Air Filtration Products has a policy of continuous product research and development and reserves the right to change design and specifications without notice



A-1002-A (6/06)

© Copyright CLARCOR Air Filtration Products 2006

Phone: 215-679-6645 Fax: 215-679-6648 E-mail: [sales@precisionfiltration.com](mailto:sales@precisionfiltration.com) web site: [www.precisionfiltration.com](http://www.precisionfiltration.com)