


# In-Line Air & Gas Filters

Series E20 - Enameled Steel w/Bolted Closure  
 Series E22 - 304 Stainless Steel w/Bolted Closure

**Precision Filtration Products**

**YOUR ONE STOP FOR FILTERS**

- **Air/Gas Flows to 20,000 SCFM**
- **Low ΔP / High Flow Design**
- **304SS Throat Safety Cages Std.**
- **Rugged Enameled Steel Construction** Series E20 & E22 air/gas filters utilize a single self sealing cylindrical filter element to provide the ultimate in protection for compressors, blowers, turbines, engines, and other pipeline equipment. Fabricated from heavy gauge enameled or 304stainless steel, they utilize a bolt seal closure with neoprene or teflon gasketing for service to 5 psid\*. Any model can be modified to more exactly suit your needs.
- **Connections to 24"** Male NPT (MT) or flat face flanges (FF) are std. Flanges match diameter & drilling for 150# ANSI standard. Specify optional female NPT (FT), bevel (BE) or plain cut (PE) stub necks where you wish to weld in place. Increased or decreased connections are also available on any model.
- **Choice of Filter Elements** Series E22 In-Line Air & Gas Filters are similar to enameled steel series E20 but are constructed instead from 304 stainless steel. Filter elements w/304 SS media support screen &/or center cores are also available. (Replace the "K" in the filter element part number with an "N" for 304SS core and 304SS media support screen, or a "Q" for 304SS core with epoxy coated aluminum media support screen). These textile media elements are superior for low ΔP, high dirt holding capacity and exceptional efficiency. They stop pipe scale and other contaminants before they can travel downstream. Select from 10μ, 4μ High Efficiency, or 0.3μ coalescing filter elements as your needs dictates to remove 98% of all dust, dirt, and if coalescing, fine mists. Add'l. media and element styles are available for services at elevated temperatures or specific chemistries.
- **Connection Sizes to 24"**
- **Options:** ΔP Taps, Angle legs, ΔP gauge



\*When used for coalescing services, housings must be installed with flow reversed from that shown above. Inlet flow should travel first to the inside of the filter element, passing through the media to the outside. Coalesced liquids will also pass through the element to collect in sump area below.




Access Handles Standard on Models with OD 12" and greater.

\* Consult us for use with reciprocating compressors, or designs to 15 psid.



Note maintenance free 304SS safety cage and high performance filter element. PE connections (Housing cover & filter element sealing plate removed)

Enameled Steel Housing w/Blt'd Closure, Cat. No.	304SS Housing w/Blt'd Closure, Cat. No.	Type Flow CFM	Std Connection		Approximate Dimensions, Inches					Wgt lbs.
			Size	Type	OH	OD	C1	C2	SS	
E20-0001-MT-015	E22-0001-MT-015	55	1-1/2"	MPT	12-1/2"	6-5/8"	3"	14"	5"	20
E20-0002-MT-020	E22-0002-MT-020	90	2"	MPT	15-1/2"	6-5/8"	3"	14"	8"	21
E20-0003-MT-030	E22-0003-MT-030	200	3"	MPT	26"	8-5/8"	4"	16"	16"	44
E20-0004-MT-040	E22-0004-MT-040	350	4"	MPT	26"	10-3/4"	4"	22"	16"	70
E20-0005-FF-060	E22-0005-MT-060	800	6"	Fig.	40-1/2"	12-3/4"	6"	24"	25"	120
E20-0006-FF-080	E22-0006-MT-080	1500	8"	Fig.	42-1/2"	16"	8"	28"	25"	200
E20-0007-MT-100	E22-0007-MT-100	2400	10"	Fig.	48-1/2"	20"	10"	32"	25"	240
E20-0008-MT-120	E22-0008-MT-120	3400	12"	Fig.	48-1/2"	24"	10"	36"	25"	310
E20-0009-MT-160	E22-0009-MT-160	5400	16"	Fig.	50-1/2"	32"	12"	44"	21"	530
E20-0010-MT-200	E22-0010-MT-200	8500	20"	Fig.	62-1/2"	36"	14"	48"	25"	660
E20-0011-MT-240	E22-0011-MT-240	12,000	24"	Fig.	68-1/2"	44"	18"	56"	25"	950

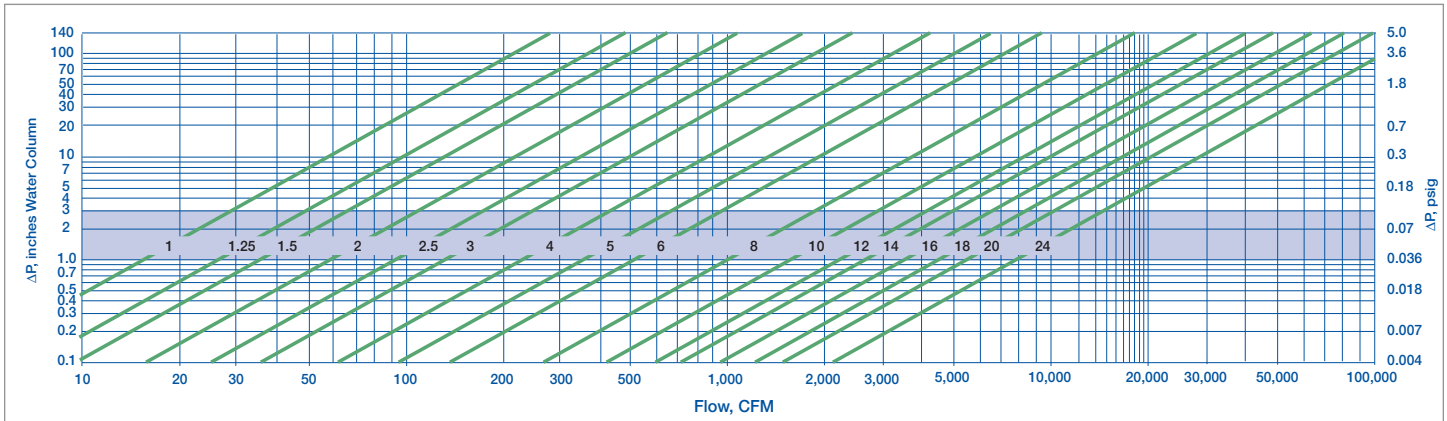

Use the chart above, to access the init. ΔP vs. flow for series E, F, & H2O air intakes. Be aware that the maximum practical flow through a filter housing, like other piping, is limited primarily by the cross sectional area of the connection. Compare the connection size shown with the desired flow. It is prudent to select a connection having a value that

is central to the shaded area for suction induced flow. While engines and reciprocating compressors routinely tolerate inlet air restrictions to 20" W.C. (water column), lesser blowers or fans may require element service at 5" W.C. While the init ΔP does not increase, the specific filtration resistance of the airborne contaminates in your location ultimately

dictates filter element life. High performance textile elements routinely serve for periods from 3 mos. to 2 yrs., with 1 yr. being common. Use of In-line filters as guard filters between bag houses and blowers is common and life between cleanings will vary with bag quality and type frequency.

Precision Filtration Products • P.O. Box 218 Pennsburg, PA 18073

Phone: 215-679-6645 Fax: 215-679-6648 E-mail: sales@precisionfiltration.com web site: www.precisionfiltration.com