


PIPELINE FILTERS - 90°

FEATURES


- Flow rates up to 30,000 SCFM
- Connection Sizes of 1 1/2" to 24"
- Low pressure drop and low energy loss
- Used in applications where long service life is essential
- Provides protection of air compressors, blowers, and engines in both indoor and outdoor service

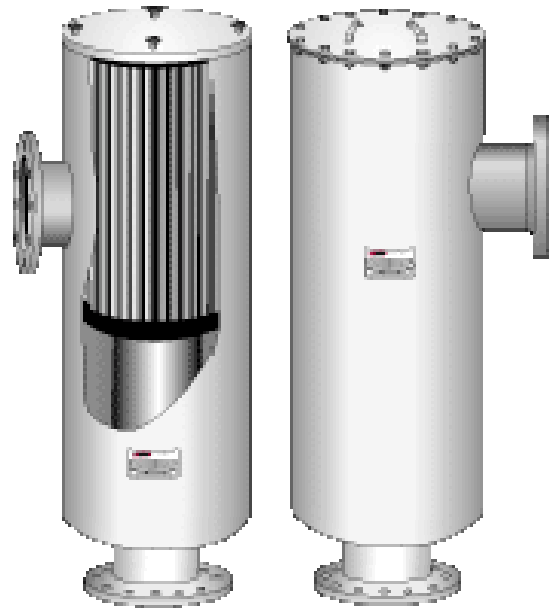

CONSTRUCTION

- Standard construction is of welded carbon steel coated with an industrial enamel finish, providing strength and durability.
- Also available with stainless steel construction for additional strength and durability.
- Cap Closure - used for ambient pressure conditions.
- Bolted Closure - used for pressures up to 5PSID.
- May be modified or customized to meet your specific requirements.

Cap Closure

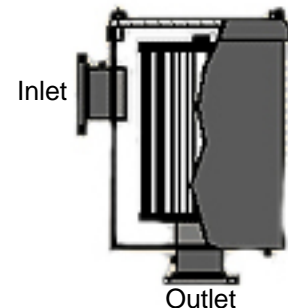

CONNECTION

- Sizes of 1/2" to 24"
- Male NPT or plate flanges are standard
- Flanges match diameter and drilling for 150# ANSI
- Optional connections available - right angle base for side mounts, female NPT, bevel, and plain cut.

Bolt Closure

