



PFC Pneumatic Filter Cart

Flow rates up to 49 GPM (185.49 LPM)




Our PFC Pneumatic Filter Cart was designed by a Certified Lubrication Specialist. The PFC Filter Cart is ideal for high viscosity lubrication and hydraulic oils. It can be used for filtering new fluids during transfer and replenishment, as well as, filtering fluids currently in service. The two stage filtration offers the advantage of removing both particulate and water contamination.

Our PFC Filter Cart utilizes a positive displacement pneumatic pump that transfers fluids by movement of diaphragms driven by compressed air. Our PFC Filter Cart incorporates a pulsation dampener which acts as an air cushion and automatically adjusts to the pressure change and absorbs any pulsation.

Features:

- 3.4 GPM to 49 GPM (12.87 LPM to 185.49 LPM)
- 1/4" to 1" Connection Sizes
- Pneumatic Pump
- Pulsation Dampener
- 2 Stage Filtration
- Stainless Steel Filter Housings
- Differential Pressure Gauges
- Sample Ports

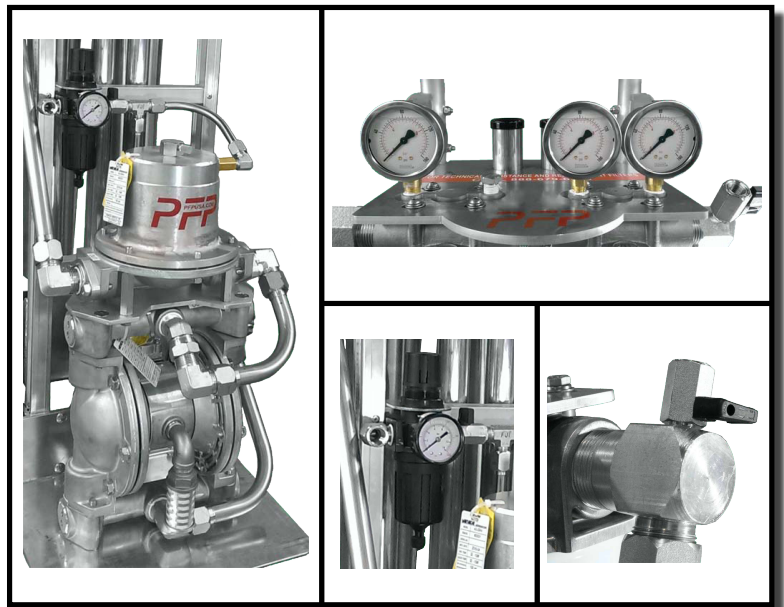

Our PFC Filter Cart was designed with the operator in mind. It includes wands storage and a drip pan to minimize spillage. The 10" Pneumatic Wheels provide shock absorption, quiet operation, and ease of rolling over rough terrain. The PFC Filter Cart can lay in a horizontal position allowing it to sit flat in the back of a truck for easy transportation from varies locations.



Wand Storage



Drip Pan



10" No-Flat
Pneumatic
Tires



Horizontal Storage



Precision Filtration Products | Pennsburg, PA
215-679-6645 | 215-679-6648
sales@pfpusa.com | www.pfpusa.com