


Clay Treater Housings

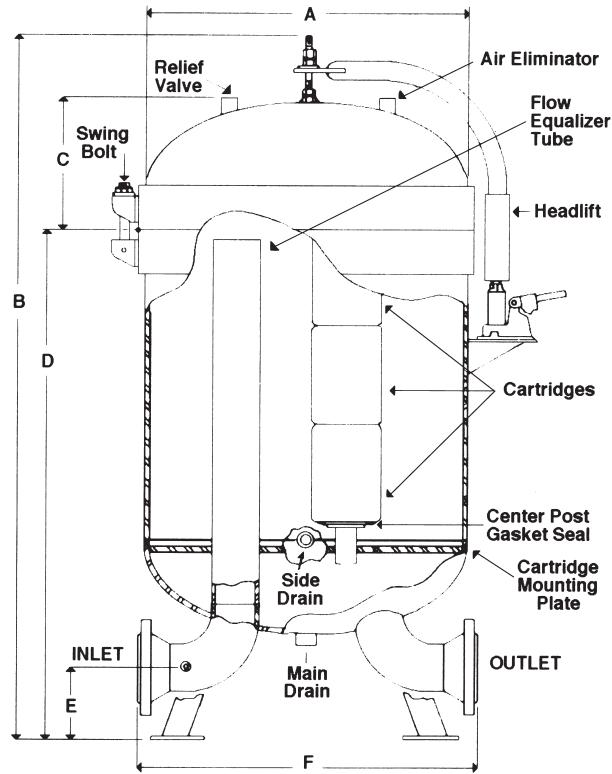

STANDARD HOUSING DATA AND FLOW RATES

MODEL NUMBER	FLOW RATE		LIQUID VOLUME		REQUIRED CARTRIDGES	DRY WEIGHT		HOUSING TYPE
	gpm	lpm	gals.	ltrs.		lbs.	kgs.	
13F3-C	275	1041	288	1090	39	1913	868	Dished
24F3-C	500	1893	456	2067	72	3250	1474	Dished
31F3-C	650	2460	702	2657	93	4459	2023	Dished
40F3-C	840	3179	874	3308	120	5380	2440	Dished
50F3-C	1050	3974	1167	4417	150	6976	3164	Dished
60F3-C	1260	4769	1442	5458	180	8298	3764	Dished
67F3-C	1407	5325	1570	5942	201	9602	4355	Dished

Other sizes available on request.

Weights and volumes are approximate.

NOTE: Removable bundle design available on request. Contact your Facet Representative for details.

DIMENSIONAL DATA

MODEL NUMBER	INLET/OUTLET DIAMETER		DIMENSIONS										ANCHOR BOLT					
			A		B		C		D		E		F		BOLT CIRCLE		BOLT HOLE	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
13F3-C	4	102	32	813	127 ¹ / ₄	3232	12 ³ / ₄	324	87 ¹ / ₂	2222	6	152	30	762	27 ³ / ₈	695	7 ⁷ / ₈	22
24F3-C	4	102	42 ³ / ₄	1086	134 ³ / ₁₆	3408	16 ³ / ₄	425	90 ⁷ / ₁₆	2297	6	152	30	762	36 ¹ / ₂	927	7 ⁷ / ₈	22
31F3-C	6	152	48 ³ / ₄	1238	141	3581	18 ³ / ₄	476	95	2413	7 ¹ / ₂	191	47	1194	40 ¹ / ₂	1022	1 ¹ / ₈	29
40F3-C	6	152	54 ³ / ₄	1391	145 ⁵ / ₁₆	3691	20 ¹³ / ₁₆	529	97 ¹ / ₄	2470	7 ¹ / ₂	191	43	1092	50	1270	1 ¹ / ₈	29
50F3-C	8	203	60 ³ / ₄	1543	152 ¹ / ₁₆	3878	23 ³ / ₄	591	102 ³ / ₄	2610	9	229	55	1397	52	1321	1 ¹ / ₈	29
60F3-C	8	203	67	1702	154 ³ / ₄	3931	25 ³ / ₈	645	102 ³ / ₄	2610	9	229	60	1524	52	1321	1 ¹ / ₈	29
67F3-C	8	203	73	1854	158	4013	27 ⁵ / ₈	702	104	2642	9	229	62	1574	56	1422	1 ¹ / ₈	29

Other sizes available on request.

NOTES:

1. Housing model number will include clay treater cartridge model number when selected.
2. Clay treater housings use Facet bag or canister style cartridges. 3 deep per stack.
3. Clay treater cartridges are **not** installed at factory prior to shipment.

Due to our continuing program of improvement, specifications are subject to change without notice.